

Tik-61.140 Signal processing systems

1. partial test, mo 1.3.1999 12-15 BC

You can take advantage of

- a mathematical handbook
- graphical calculator. **Remember to erase the memory!**

1. Consider the discrete systems below:

$$\begin{aligned}y_1[n] &= x[-n]; \\y_2[n] &= x[n-2] - 2y_2[n-8]; \\y_3[n] &= nx[n],\end{aligned}$$


where $y_i[n]$ is the output of the system to input $x[n]$.

Are the systems

- memoryless,
- timeinvariant,
- linear or
- causal.

Justify your results shortly!

2. Consider the feedback system given below. Let us assume that the output $y[n] = 0$ when $n < 0$.

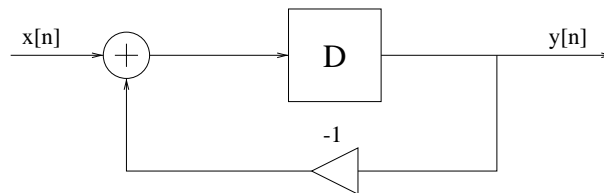


- Sketch the output, if the input is $x[n] = \delta[n]$;
- Sketch the output, if the input is $x[n] = u[n] - u[n-2]$.
- Is the system stable? Justify!

3. Consider the signals given below:

- $x_1(t) = 2e^{j(t+\frac{\pi}{4})}$,
- $x_2[n] = \sin(\frac{\pi}{4}n)u[n] - \sin(-\frac{\pi}{4}n)u[-n]$ and
- $x_3[n] = \sum_{k=-\infty}^{\infty} \{\delta[n-4k] - \delta[n-1-4k]\}$.

Which of the signals are periodic? Justify! Determine the fundamental periods of the periodic signals.

- The impulse response of a system is $h_1[n] = u[n] - u[n-2]$. Is the system linear and/or timeinvariant?
- The system h_1 is connected in cascade with a causal LTI-system h_2 , according to the block diagram shown below:



Calculate the impulse response of the other system $h_2[n]$, when the impulse response of the *total system* $h[n]$ is the impulse response shown in the table below.

n	< 0	0	1	2	3	4	> 4
h[n]	0	1	5	9	7	2	0

- Calculate the output of the total system, when the input is $x[n] = \delta[n+1] - \delta[n-1]$.

Notice that in all the problems above the unit-impulse is noted by $\delta[n]$ and the unit-step function is noted by $u[n]$.